

# 5.0 Mega-Pixel Out-Door IR Fixed Bullet Camera

## LNI-B613650-IRX

### Key Feature



- 1/2.7" Progressive CMOS Sensor
- 5.0 Mega pixel Resolution (2592 x1944)
- 3.6mm Lens (2.8mm, 6.0mm, 8mm Optional)
- H.264 & H.265, Dual-Stream Encoding
- Built in Mic (Optional)
- PoE IEEE 802.3af Class 2 / 12V DC Input
- 4pcs. High Power Array IR LED
- IR Distance Up to 50mtr
- Support ONVIF Profile
- IP66 Compliant metal body


### Technical Specification

Model no	LNI-B613650-IRX	
Image Sensor	1/2.7" 5MP Progressive CMOS Sensor	
Effective Pixels	2592 (H)x1944 (V)	
Minimum Illumination	Color: 0.01 Lux @F1.2, B/W: 0.001 Lux@F1.2, 0 Lux at IR ON	
S/N Ratio	>60dB	
IR Distance	IR Distance Up to 50Mtr	
Shutter Speed	Auto, Manual Mode: 1/50 sec 1/10000 sec	
WDR	D-WDR (T-WDR Optional)	
IR On/Off Control	Auto/ Manual	
IR LEDs	4 Array IR LED	
<b>Lens</b>		
Lens Type	Fixed	
Mount Type	M12	
Focal Length	3.6mm	
Max. Aperture	F1.8	
Angle of View	Horizontal Angle- 72°, Vertical Angle- 54°, Diagonal Angle- 86°	
Focus Control	Fixed	
<b>Audio</b>		
Audio	1IN/1 Out (Optional)	
Compression	G.711A/U	
Talk Back	Support (Optional)	
<b>Alarm</b>		
Alarm	1IN/1 Out (Optional)	
<b>Network</b>		
Ethernet	10/100M adaptive Ethernet interface	
Protocol	TCP/IP, UDP, RTP, RTSP, RTCP, HTTP, DNS, DDNS, DHCP, FTP, NTP, SMTP, UPNP, SSMTP, IPV6, IPV4	
OnVif	ONVIF Profile S & G	
Max. User Access	20 Users	
Edge Storage	Local PC for instant recording, one clicks Snapshot, one clicks triple Snapshot	
Web Viewer	IE, Chrome, Firefox, Safari	

## Technical Specification

Video		IR reverse	Support
Compression	H.264, H.265	Mirror	Off / On
Streaming Capability	2 Streams	Text Overlay	Title, Date & Time, Weekday
Resolution	5MP (2592X1944)/1080P(1920×1080)/1.3M(1280×960)/720P(1280×720) D1(704×576/704×480)/VGA (640×480)/CIF (352×288/352×240)	Privacy Masking	Yes (4 zones)
Streams	Mainstream: 5MP(2592X1944)@15/20FPS/2MP 1920(H)×1080(V), 1080@25/30FPS Sub Stream: D1(704(H)×576(V))@15/20 FPS/ CIF (352×288/352×240)@25/30FPS	<b>Events</b>	
Frame Rate	1 ~ 25/30fps	Motion Detection	22X18 Zones
Bit Rate Control	CBR/VBR	Video Blind	Support
Bit Rate	Primary 1024-8192Kb/s, Secondary Stream: 341-1706Kb/s	Abnormality	No Disk, Disk Error, Disk No Space, Network Cable Disconnected, IP Address Conflict
Day/Night	Automatic/Color/Black and white	Smart Functions	Intrusion Detection, Line crossing detection, Human Detection
Exposure Mode	Automatic/Manual-(1/50-1/10000)	Event Actions	Record alarm, Linkage alarm output, Sound alarm, Email link, Upload FTP, Snapshot
BLC Mode / HLC	On/Off	<b>Safety</b>	
Profiles	Auto, Low Light Priority, High Light Priority	ONVIF Authentication	ON, OFF
Noise Reduction	Auto, 2D/3D (1-6 Levels)	RTSP Authentication	Digest, None
Gain Control	Auto/Manual	<b>General</b>	
Anti-Flicker	On/Off	Operating Conditions	-30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH
AE reference	1-255 Level	Ingress protection	IP66 Complaint
AE Sensitivity	1-10 Level	Power Supply	DC 12V ± 10%, Optional: PoE (802.3af, class 3)
Flip	Off / On	Power Consumption	Max 12W
		Product Certification	Safety: CE, FCC, IS/EN:60950-1, IS:13252 (Part 1): 2010, BIS Registered Immunity: FCC

## Dimensions

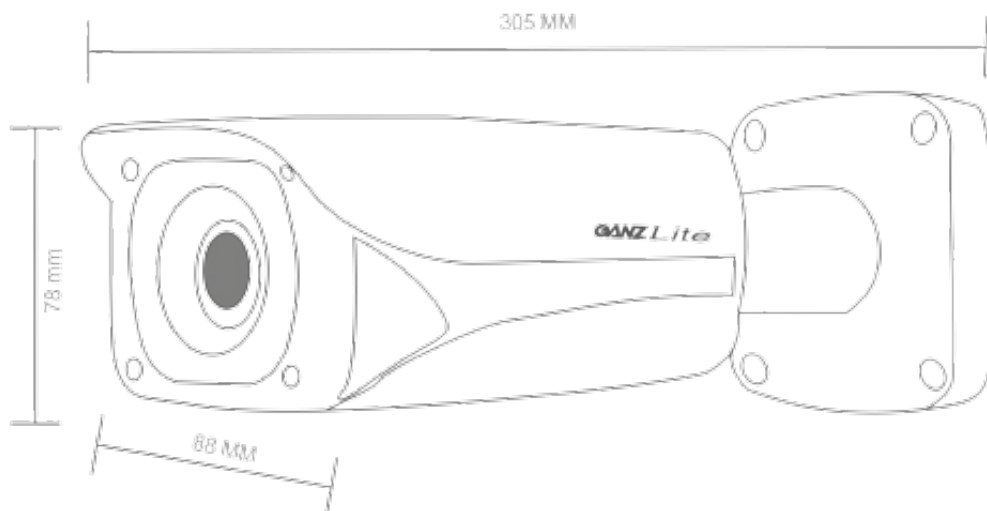

The above mentioned technical drawings are for reference only.