

16CH, 2HDD NVR

LNI-4016H2-X

Key Feature



- 16CH Network Video Recorder
- Support Up to 4 Mega-pixel Camera
- 2 SATA HDD Up to 8TB
- 2 RJ45 10M/100M/1000M network interface
- HDMI & VGA simultaneous video output
- Auxiliary screen
- 8CH Alarm In/1CH Alarm Out
- 1CH Audio In/1CH Alarm Out
- Smart search & Playback


Technical Specification

Model no	LNI-4016H2-X	Playback and Backup	
Camera Input	16 Channel	Sync Playback	16/9/4/1
Incoming Bandwidth	160Mbps	Search Mode	Time /Date, Alarm, Picture grid, Event
Outgoing Bandwidth	160Mbps	Playback Function	Play, Pause, Stop, Rewind, Fast play, Slow Play, Next File, Previous File, Next Camera, Previous Camera, Full Screen, Shuffle, Backup Selection, Digital Zoom
Video Output		Backup Mode	USB Device, Network
HDMI Output	3840x2160, 1920x1080, 1440x900, 1280x1024	Network	
VGA Output	1920x1080, 1280x1024, 1280x720	Network Function	HTTP, HTTPS, TCP/IP, IPv4, UPnP, UDP, RTSP, SMTP, NTP, DNS, DHCP, P2P, IP Filter, DDNS, 802.1X, SNMP
Decoding Capacity	1CH 8MP/4CH 1080P@30FPS	Remote Users	9 users
Dual Stream	Support	Smart Phone	iPhone, iPad, Android
Multi-screen Display	1/4/9/16	OnVif	ONVIF Profile S
Recording		Storage	
Resolution	8MP/6MP/5MP/4MP/3MP/1080P/720P/D1	HDD	2 SATA Ports, up to 8TB for each HDD
Recording Mode	Manual, Schedule (Regular, Continuous), Motion Detection, Video Loss, Camera Tamper, Alarm IN	eSATA	N/A
Trigger Events	Motion Detection, Video Loss, Alarm IN		

Technical Specification

Interface		Power Consumption	< 5W (without HDD)
RJ45	2 RJ-45 port (10/100/1000Mbps)	Operating Conditions	-10 °C ~ 50 °C (14 °F ~ 122 °F)
Audio I/O	1/1	Storage Conditions	Less than 90% RH
Alarm I/O	8CH Alarm In/1CH Alarm Out	Certifications	CE / FCC / BIS / EN / RoHS
USB	2 ports (USB 2.0 × 2)	Dimensions	372×310.5×46.5mm
General		Net Weight	2.1Kg (without HDD)
Power Supply	DC12V/3A		

Dimensions

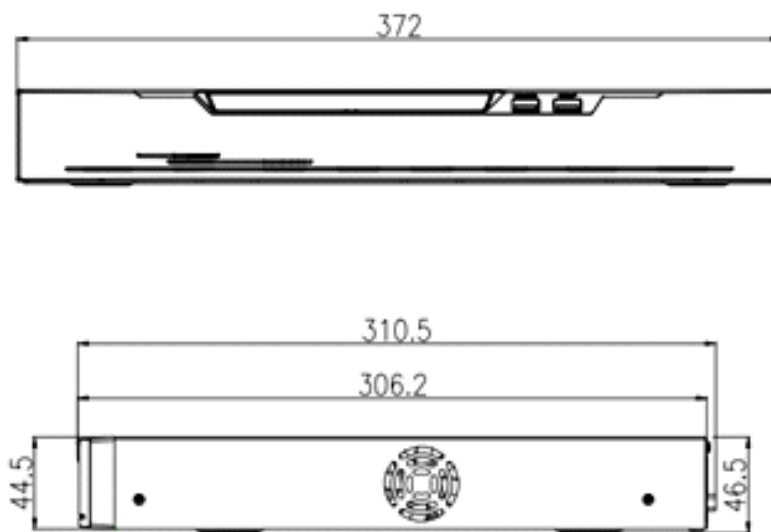

The above mentioned technical drawings are for reference only.