

FEATURES

- Support up to 32 Camera
- 4 SATA HDD (Each up to 12TB)
- 2 RJ45 10M/100M/1000M network Interface
- Simultaneous HDMI & VGA up to 4K output
- User-friendly GUI/WEB/Client
- 1CH Audio IN and 1CH Audio Out
- 16CH Alarm IN and 4CH Alarm Out
- EN / CE / FCC / RoHS / BIS



TECHNICAL SPECIFICATIONS

SYSTEM	
MODEL :	NR8-32F124
Main Processor	Dual-Core embedded processor
Operating system	Embedded LINUX
VIDEO & AUDIO	
IP Camera Input	32 Channel
Audio I/O	1 Audio IN & 1 Audio Out
Two-Way Audio	Yes
DISPLAY	
Interface	2 HDMI, 1 VGA
Resolution	HDMI 1 : 1920x1080, 1280x720, 1024x768 HDMI 2 : 3840x2160, 1920x1080, 1280x720, 1024x768 VGA : 1920x1080, 1280x720, 1024x768
Decoding capacity	32CH D1, 16CH 1080P, 9CH 1080P, 4CH 8MP@30fps, 1CH 12MP@20fps
Multi Screen Display	1/4/8/9/16/32
RECORDING	
Compression	H.265+ / H.265 / H.264
Resolution	12MP / 8MP / 6MP / 5MP / 4MP / 3MP / 1080P / 720P / D1
Record rate	320Mbps
Bit Rate	100Kbps ~ 8Mbps Per Channel
Record Mode	Manual, Schedule (Regular, Continuous), Motion Detection, Video Loss, Camera Tamper, Alarm in
Record Interval	Post-record: 30 ~ 60 sec



32CH 4HDD NVR

VIDEO DETECTION &ALARM	
Trigger Events	Recording, Buzzer, Push message, Pop up message
Video Detection	Motion Detection, Video Loss, Camera Tamper
Alarm In/Out	16/4
PLAYBACK AND BACKUP	
Sync Playback	16/9/4/1
Search Mode	Time /Date, Alarm, Picture grid, Event
Playback Function	Play, Pause, Stop, Rewind, Fast play, Slow Play, Next File, Previous File, Next Camera, Previous Camera, Full Screen, Shuffle, Backup Selection, Digital Zoom
Backup Mode	USB Device
NETWORK	
Network Function	HTTP, HTTPS, TCP/IP, IPv4, UPnP, UDP, RTSP, SMTP, NTP, DNS, DHCP, P2P, IP Filter, DDNS, 802.1X, SNMP
Max. User	Access 9 users
Smart Phone	iPhone, iPad, Android
Protocol	Onvif
STORAGE	
Internal HDD	4 SATA Ports, up to 12TB for each HDD
eSATA	Support
DISK ARRAY	
Array Type	RAID 5, RAID 6, RAID 10
INTERFACE	
Interface	2 RJ-45 port (10/100/1000Mbps)
PoE Interface	N/A
PoE Max Power	N/A
USB	3 ports (USB 2.0 x2, USB3.0 x1)
Rs485	Support
Rs232	Support
GENERAL	
Power Supply	AC100~240V
Power Consumption	< 15W (without HDD)
Operating Conditions	-10 °C ~ 50 °C (14 °F ~ 122 °F)
Storage Conditions	Less than 90% RH
Certifications	EN / CE / FCC / RoHS / BIS
Dimensions	440 × 368.3 × 70mm
Net Weight	4.2kg (No disk)

32CH 4HDD NVR

Dimensions

Unit: mm

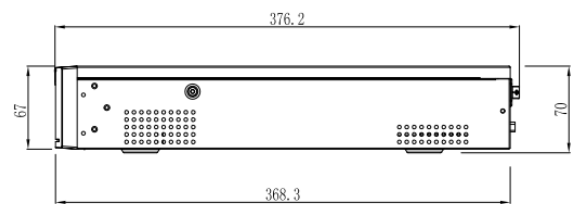

CBC (Europe) GmbH
 Hansaallee 191
 D-40 49 D sseldorf
 T: +49-(0)211 3 06 70
 F: +49-(0)211 3 06 71 80
 info@cbc-europe.com
 www.cbc-europe.com

CBC (Poland) Sp.z.o.o
 Oddzial w Warszawie
 Ul. Krasynskiego 41A
 PL-01-7 Warsaw
 T: +48-(0)22 6 33 90 90
 F: +48-(0)22 6 33 90 60
 info@cbcpoland.pl
 www.cbcpoland.pl

CBC Russia Mosco Rep. of ce
 Of ce 03B World Trade Center
 12 Krasnopresnenskaya nab.
 U-11123610 Moscow
 T: +7-49 2 8 2161
 F: +7-49 2 8 2160
 info@cbc.ru
 www.cbc.ru

CBC (Europe) Ltd. f cio di Milano
 Via E. Ma orana, 2
 I-20834 Nova Milanese (MB)
 T: +39-0362 36 0 79
 F: +39-0362 4 00 12
 info@cbceurope.it
 www.cbceurope.it

CBC CORPORATION (INDIA), PRIVATE LTD
 2F B Wing, Marwah Centre
 Krishanlal Marwah Marg
 Andheri East, Mumbai 400 072, India
 T: +91 22 28 7 9798
 F: +91 22 6649 1708
 enquiry@cbcindia.com

CBC (Europe) GmbH
 7/8 Garrick Industrial Centre
 Irving Way
 UK-NW9 6AQ London
 T: +44-(0)20 87 32 33 10
 F: +44-(0)20 82 02 33 87
 info@cbcuk.com
 www.cbceurope.com