

## FEATURES

- Support up to 4 IP Camera
- 1 SATA HDD ( Each up to 8TB)
- 2 RJ45 10M/100M network Interface
- 40 Mbps incoming/outgoing bandwidth
- Support face and multi-objective recognition
- Support 1 HDMI and 1 VGA interface
- CE/FCC/BIS/NDAA



## TECHNICAL SPECIFICATIONS

VIDEO INPUT Parameters	NR9-4F81-I
IP Camera Input	4 Channel
Incoming Bandwidth	40 Mbps
Outgoing Bandwidth	40 Mbps
VIDEO OUTPUT Parameters	
HDMI 1 Output	3840×2160, 1920×1080, 1280×1024, 1024×768
HDMI 2 Output	NA
VGA Output	1920×1080, 1280×1024, 1024×768
Different Source Output	Support
Decoding Capacity	1ch 12MP, 4ch 4MP
Dual Stream	Support
Multi Screen Display	1/4
AI Parameters	
Face Comparison	Real-time captured and display faces comparison results (Name and ID, stranger, channel, similarity)
Multi-objective	Real-time captured and display vehicle, human body, non-motor vehicle, license plates image, and faces comparison results (registrant, stranger, channel, similarity)
Smart Search	Time, Properties, Pictures, Gender, Cycling style, Vehicle color, License plate
Trigger Events	Buzzer, Alarm push, Alarm prompt, Email, Alarm Out, Compare the result simultaneously, etc.

# 4CH 1HDD 4K NVR



RECORDING Parameters	
Resolution	12MP, 8MP, 6MP, 5MP, 4MP, 3MP, 1080P, 720P, D1 etc.
Recording Mode	Manual, Schedule (Regular, Continuous), Event
Trigger Events	Motion Detection, Video Loss, Alarm in, IVS
PLAYBACK AND BACKPU Parameters	
Sync Playback	4/1
Search Mode	Time /Date, Alarm, Picture grid, Event
Backup Mode	USB Device, Network
ALARM Parameters	
General Alarm	Motion Detection, Video Loss, Alarm in, Alarm out
Smart Encoder (By Camera)	Smoking Detection, Smoke and Fire Detection, Fire Spot Detection, Intrusion, Single Line Crossing, Double Line Crossing, Loitering, Wrong-way, Illegal Parking, People Counting, Enter or Exit Area, etc.
Abnormal Alarm	Disk Alarm, IP Address Conflict, Network Disconnect
Intrusion Detection (By NVR)	4ch, support the accurate detection of human and vehicle
NETWORK Parameters	
Network Function	HTTP, HTTPS, TCP/IP, IPv4, UPnP, UDP, RTSP, SMTP, NTP, DNS, DHCP, P2P, IP Filter, DDNS, 802.1X, SNMP, 3G/4G, PPPoE
P2P	Support
Remote Users	8 users
Interoperability	ONVIF, SDK, CGI
STORAGE Parameters	
ANR	NA
Disk Group	NA
RAID	NA
INTERFACE Parameters	
HDD Interface	1 SATA interfaces, up to 8TB capacity for each disk
Network Interface	2 × RJ-45, 10/100 Mbps self-adaptive Ethernet port
PoE Interface	NA
eSATA	NA
HDMI	1
VGA	1
Audio In/Out	1/1
Alarm In/Out	4/1
USB Interface	Front panel: 2 × USB 2.0
RS-485 Interface	NA
RS-232 Interface	NA
Reset Button	On-board reset button

# 4CH 1HDD 4K NVR

GENERAL Parameters	
Power Supply	DC12V/3A
Power Consumption	< 10 W (without HDD)
Operating Conditions	-10 °C ~ 50 °C (14 °F ~ 122 °F)
Storage Conditions	Less than 90% RH
Certifications	CE/FCC/BIS/NDAA
Dimensions	255 x 235.1 x 47.5 mm (10.04 x 9.26 x 1.87 inch)
Net Weight	0.8 kg (1.76 lb) without HDD

## Dimensions

Unit: mm

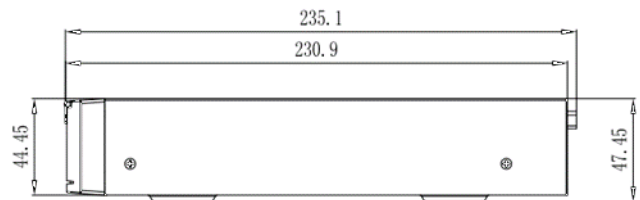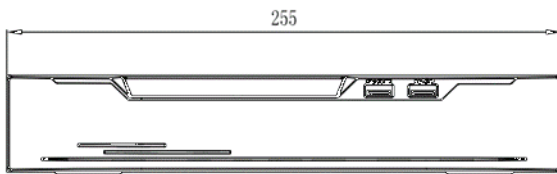

**CBC (Europe) GmbH**  
Hansaallee 191  
D-40 49 D sseldorf  
T: +49-(0)211 3 06 70  
F: +49-(0)211 3 06 71 80  
info@cbc-europe.com  
www.cbc-europe.com

**CBC (Poland) Sp.z.o.o**  
Oddział w Warszawie  
Ul. Krasynskiego 41A  
PL-01-7 Warsaw  
T: +48-(0)22 6 33 90 90  
F: +48-(0)22 6 33 90 60  
info@cbcpoland.pl  
www.cbcpoland.pl

**CBC Russia Mosco Rep. of ce**  
Of ce 03B World Trade Center  
12 Krasnopresnenskaya nab.  
U-11123610 Moscow  
T: +7-49 2 8 2161  
F: +7-49 2 8 2160  
info@cbc.ru  
www.cbc.ru

**CBC (Europe) Ltd. f cio di Milano**  
Via E. Ma orana, 2  
I-20834 Nova Milanese (MB)  
T: +39-0362 36 0 79  
F: +39-0362 4 00 12  
info@cbceurope.it  
www.cbceurope.it

**CBC CORPORATION (INDIA), PRIVATE LTD**  
2F B Wing, Marwah Centre  
Krishanlal Marwah Marg  
Andheri East, Mumbai 400 072, India  
T: +91 22 28 7 9798  
F: +91 22 6649 1708  
enquiry@cbcindia.com

**CBC (Europe) GmbH**  
7/8 Garrick Industrial Centre  
Irving Way  
UK-NW9 6AQ London  
T: +44-(0)20 87 32 33 10  
F: +44-(0)20 82 02 33 87  
info@cbcuk.com  
www.cbceurope.com